

Wave

Instructions for mounting and use

安装和操作说明

Basic set for freestanding bath mixer

单把落地浴缸龙头底座





These instructions are part of the Duravit product and must be read carefully and kept available at all times.

Target readership and qualifications

The product may only be installed by a qualified plumber.

Explanation of the key words and symbols



Prompt for inspection
(e.g. for scratches)



Prompt to inspect
for leaks and leak-tightness



Prompt to wear gloves

Technical data

Operating pressure max. 1,0 MPa

Recommended 0,1 - 0,5 MPa

Test pressure 1,6 MPa

1 MPa = 10 bar = 145 PSI

Hot water temperature max 60 °C

Safety instructions

Cut and crushing injuries

- > Wear gloves when installing the product.

Product and/or property damage

- > Observe the local installation regulations and any country-specific standards at all times.
- > Equalise pressure differences between cold and hot water connections.
- > Observe the manufacturer's instructions for installation with continuous flow heaters.



该说明是 Duravit 产品的组成部分，必须仔细阅读并随时可用。

目标群体及资质

产品只能由经过培训的水暖工安装。

信息词及符号的解释



要求目视检查（例如：检查划痕）



要求检查 密闭性



要求 戴手套

技术数据

运行压力 最大 1.0 MPa

建议 0.1 - 0.5 MPa

检测压力 1.6 MPa

1 MPa = 10 bar = 145 PSI

热水温度 最高 60 °C







安全提示







切割和挤压伤

> 安装时佩戴手套。

产品和/或财产损失


- > 完全遵守当地供电公司的安装规定及相关国家标准。
- > 补偿热水管和冷水管之间的压力差。
- > 安装连续直通式热水器，请遵循制造商说明。

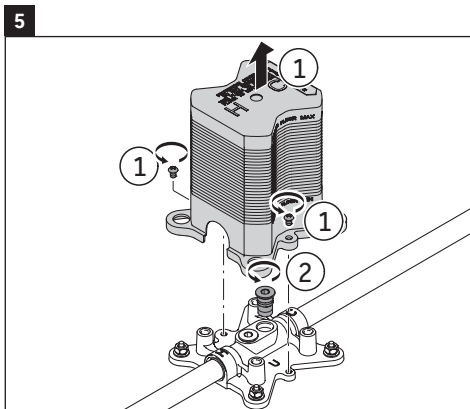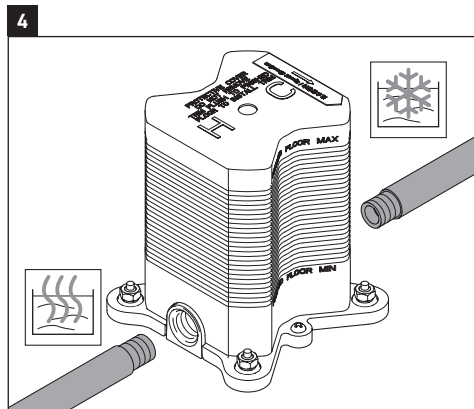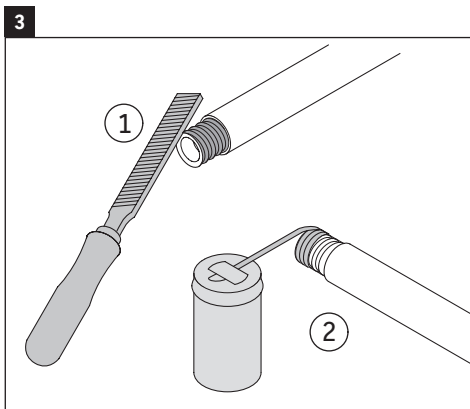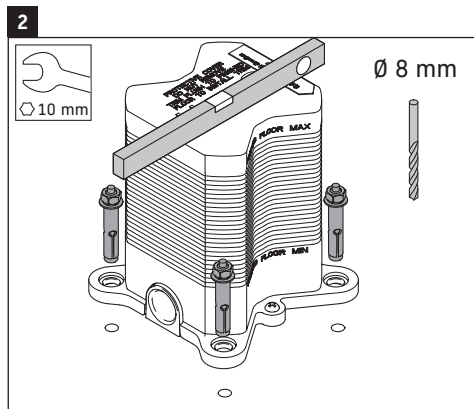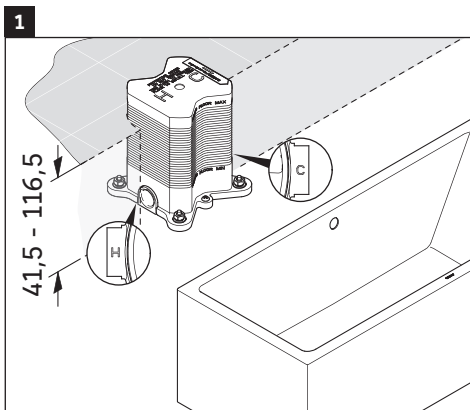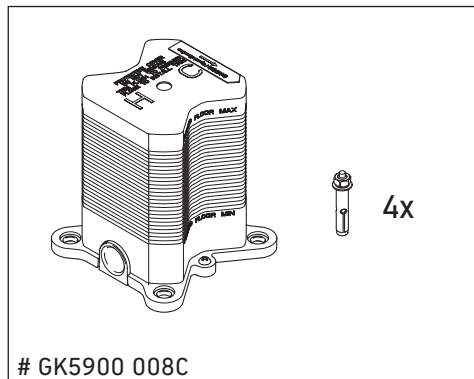

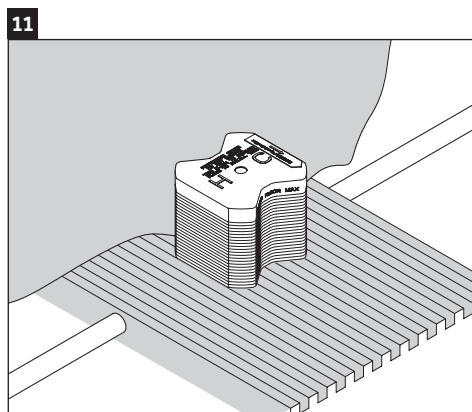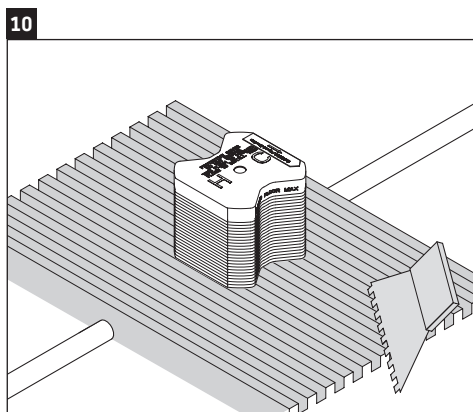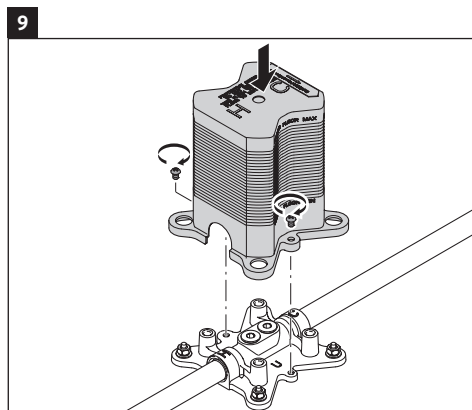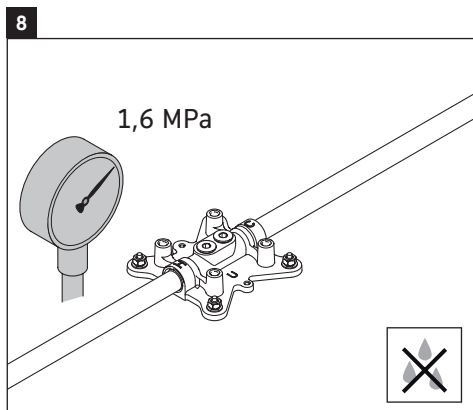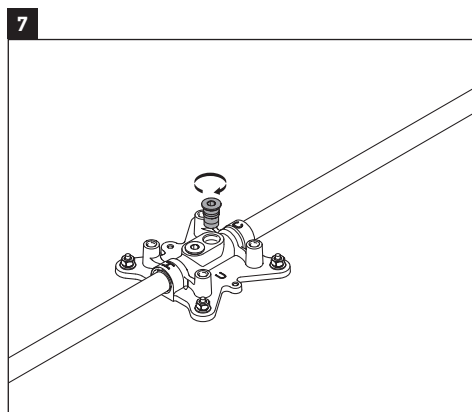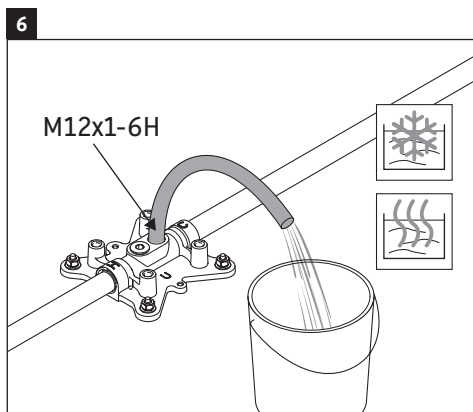



12

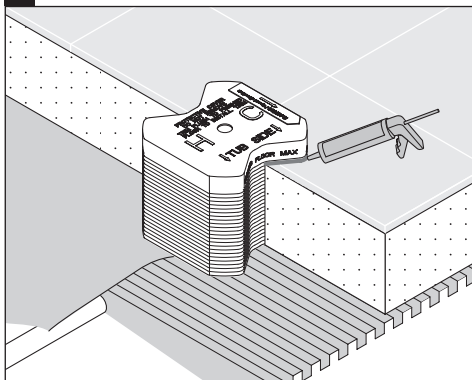

Duravit AG
P.O. Box 240
Werderstr. 36
78132 Hornberg
Germany
Phone +49 78 33 70 0
Fax +49 78 33 70 289
info@duravit.com
www.duravit.com